

CST Ladder Systems For Bolted & Welded Storage Tanks

Technical Data Sheet

CST

AQUASTORE®

TecTank™

HARVESTORE®

All CST Ladder Systems can be equipped with an OSHA compliant personal fall arrest system.

CST offers a variety of ladder systems to fit customer's specific needs and provide total ladder climbing safety for workers on any site.

CST Ladder Systems offer a ladder with more than 60 years of safe climbing history. Installation of CST's Ladder Systems means instant compliance with OSHA's fixed ladder regulations.

OSHA COMPLIANT
New Fixed Ladder Regulations

- Multiple OSHA compliant configurations to suit your needs
- Made in the USA
- OSHA compliant, cable style personal fall arrest systems can be added to any CST Ladder System
- Extra heavy duty industrial aluminum ladder
- Cage and platforms available in galvanized steel



Harness



Personal fall arrest system - Cable sleeve system

Cable Sleeve




FAQ's regarding OSHA Ladder Regulations (Standards - 29 CFR 1910 Subpart D - Walking-Working Surfaces)

OSHA is phasing out the use of ladder cages as fall protection over the next 20 years as part of recent changes to 29 CFR 1910, Subpart D. The following list provides details on a few of the changes that are most applicable to fixed ladders:

- > Fixed ladders that extend more than 24 ft. above a lower level and installed prior to 11/19/2018 must be equipped with a ladder safety system (i.e. personal fall arrest system and/or a cage).
- > Each fixed ladder installed on and after 11/19/2018 is equipped with a ladder safety system (a cage is no longer considered as a ladder safety system).
- > When a fixed ladder or cage, or any portion thereof, is replaced, at minimum a personal fall arrest system is installed in the section where the replaced section is located.
- > On and after 11/18/2036, all fixed ladders are to be equipped with a personal fall arrest system.
- > When equipped with a personal fall arrest system, a fixed ladder must have rest platforms at maximum intervals of 150 ft.
- > When equipped with a cage, fixed ladders must have offset landing platforms at maximum intervals of 50 ft.
- > A cage can be used in combination with a personal fall arrest system provided the cage does not interfere with the operation of the system.

For more information call +1 844-44-TANKS or visit us online at cstindustries.com.

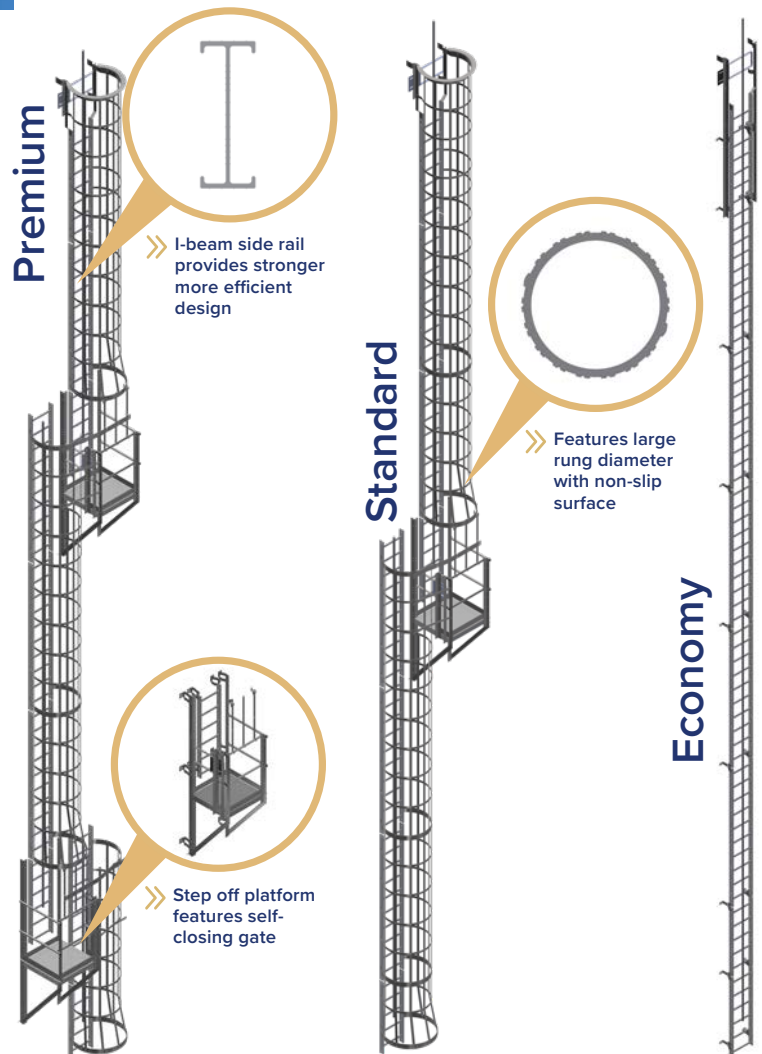

CST Ladder Systems	Applicable Heights (ft.)		Compliance ⁽¹⁾				Included				
	< 24	24 - 150	OSHA 1910	AWWA D103 ⁽²⁾	ASCE 7-10 Sect. 4.5.4	CCR Title 8 Sect. 3277	Safety Cage	Rest Platform < 30 ft.	Rest Platform < 50 ft.	Self-Closing Gate	Personal Fall Arrest System ⁽⁴⁾
Premium	X	X ⁽³⁾	X	X	X	X	X			X	X
Standard	X	X ⁽³⁾	X	X	X		X		X	X	X
Economy	X	X ⁽³⁾	X	X	X					X	X

Note:

1. Ladder compliance to any regulations not listed can be achieved but may require custom features
2. AWWA D103 compliance is for bolted tanks only
3. Ladders that extend greater than 24 ft. above a lower level require a ladder safety system to be OSHA compliant. Ladders installed in the US that must be OSHA compliant require a signed waiver from stating that the customer is responsible for installing an OSHA compliant ladder safety system.
4. An OSHA compliant cable style personal fall arrest system can be added to any CST Ladder System
5. Harvestore agricultural applications not requiring OSHA compliance (as defined by OSHA), ladder and cage option is available

CST Industries, Inc. | 903 E 104th Street, Suite 900 | Kansas City, MO 64131 USA | Ph: 844-44-TANKS | cstindustries.com



©2020 CST Industries, Inc. Aquastore and Harvestore are registered trademarks and TecTank is a trademark of CST Industries, Inc.

LS-DS-2008

